



产品册/PRODUCT CATALOGUE

Our consistent development of stitchbond nonwoven technology introduces unique performance fabrics into new and diverse market applications. Therefore, we always welcome opportunities to consult and collaborate — to help new customers discover valuable technical solutions.

我们致力于对缝编布的研发，将具有独特性能的面料引入到新的、多样化的市场应用中。因此，我们始终欢迎咨询和合作的机会，以帮助新客户发现有价值的技术解决方案。



LEEBO\丽新布

STITCHBOND\缝编聚酯布

PRODUCTION EQUIPMENT \生产线



Stitch bonding machine : 20 lines (4.16m and 2.85m width) Warping machine : 2 lines Heat setting machine : 2 lines (4.3m and 2.5m width)
GCL machine : 1 lines (6m width) Drainage composite machine : 1 lines (2m width) Digital Printing : 2 lines (2.5m width)



缝编机：20 条线 (宽 4.16m 和 2.85m) 整经机：2 条线 热定型机：2 条线 (宽 4.3m 和 2.5m)
防水毯产线：1 条线 (宽 6m) M型减震垫产线：1 条线 (宽 2m) 数码印刷设备：2条线 (宽2.5m)

STITCHBOND FOR ROOFING\屋面防水



Leebo stitchbond polyester fabrics is one of the reinforcement in cold process roofing. It offers an unusual combination of high strength properties, delivering good elongation for excellent thermal stress force with UV resistance.

丽铂牌缝织聚酯布主要用于屋面防水，具有抗紫外线、高强度、高延伸率、高渗透性，克重60-280克。



Specs (accept customized):

Gram weight: 55~280gsm (Especially: 60gsm/80gsm/100gsm)

Length: 30m~3000m

Roll Size:

4" width x 100m length

8" width x 100m length

12" width x 100m length

35" width x 5000yds length

1.0m width x 100m length

1.1m width x 100m length

规格(规格可定制):

克重: 55~280克(常规: 60克、80克、100克)

卷长: 30m~3000m

防水卷材尺寸:

10cm x 100m

20cm x 100m

30cm x 100m

1.0m x 100m

1.1m x 100m

STITCHBOND FOR SHOPPING BAG\购物袋



Rpet stitchbond fabrics is widely use for different kind of shopping bags, laminated by opp film, printing, dyeing, width from 10 cm to 215 cm wide, to meet customer requirements, weights between 60 and 300g.

丽新布可用于购物袋、手提袋。客户采购后可进行覆膜淋膜印花加工，覆膜用面料克重一般65克-130克，印花用面料克重一般在130克-300克（具有超高强度），针距14针、18针、20针，宽度颜色定制，有GRS证书，可开TC。



Specs (accept customized):

Needle gauge: 14 needles / 18 needles / 20 needles

Width: 10cm~210cm

Color: Black / White / Heat Transfer Print / Dyeing / Other

Gram weight: 60gsm~300gsm

规格 (规格可定制) :

针距: 14针、18针、20针 克重: 60克~300克

幅宽: 10cm~210cm

颜色: 黑色、白色、热转印、染色、其他可定制

STITCHBOND FOR MATTRESS\床垫



Stitchbond polyester fabric used in mattress cover fabric,box-spring fabrics,upholstery inner,bedding filler with good tensile strength and diversity styles. Have plain dyed or printed and coating provide more strength and colorful designs.

丽新布可用于床垫无纺布，其具有良好的拉伸和透气性能，接受定制阻燃。



Specs (accept customized):

Needle gauge: 12 needles / 14 needles / 18 needles / 20 needles

Gram weight: 85gsm~280gsm

Color: Grey / Yellow / Print / other coating

Width: 54"~90"

FR : CFR1633 / BS5852

规格 (规格可定制) :

针距: 12针、14针、18针、20针 克重: 85克~280克 幅宽: 137cm~229cm

颜色: 灰色、米黄色、印花。其他可定制涂层

阻燃: 美标及英标 (CFR1633 / BS5852)

STITCHBOND FOR AUTOMOTIVE\鞋材



Stitch Bonded Fabric used for shoe lining, shoe insoles, the mainstay of our deep commitment to continually pioneer the development of lightweight, high performing, reinforcing fabrics that offer cushioning, high stability and seam-holding capability.

鞋材丽新布分为白色，黑色两种，客户可以在采购后根据自己的需求进行染色，做进一步加工。强力高，纵横向强力差异小。抗菌耐酸碱、不含偶氮及其他重金属有害物质，100%无毒。



Specs (accept customized):

Needle gauge: 12 needles / 14 needles / 18 needles / 20 needles

Gram weight: 80gsm-280gsm

Color: Grey / White / other

Width: 50cm - 210cm

Hand feel: Soft or Stiff

规格 (规格可定制) :

针距: 12针、14针、18针、20针

克重: 80克-280克

颜色: 黑色、白色, 其他可定制

幅宽: 50cm - 210cm

手感: 软或硬挺

STITCHBOND FOR AUTOMOTIVE\汽车内饰



The demanding automotive market has been fertile ground for stitchbond technology including fabrics for noise dampening and seating reinforcement applications. stitchbonding fabric can be flame retardant and different color.

汽车内饰丽新布，用途广泛。包括用于降噪和座椅加固应用的织物。丽新布可做阻燃和不同颜色，可提供无毒检测证书。



- ① cabin airfilters
- ② carpet and carpet reinforcement
- ③ car mats
- ④ backing for tufted carpets
- ⑤ covering for molded seats
- ⑥ boot (trunk) liners
- ⑦ upholstery backing
- ⑧ acoustic absorbers
- ⑨ under body shield
- ⑩ high strength seat reinforcement
- ⑪ wheel arch liners
- ⑫ loudspeaker covers



Specs (accept customized):

Needle gauge: 12 needles / 14 needles / 18 needles / 20 needles

Gram weight: 90gsm-280gsm

Color: Black / White / other

Width: 50cm - 210cm

FR : US and Europe standard

规格 (规格可定制) :

针距 : 12针、14针、18针、20针

克重 : 90克-280克

颜色 : 黑色、白色、其他可定制

幅宽 : 50cm - 210cm


阻燃标准 : 国标、美标和欧标

STITCHBOND FOR FLOORING\铺地材料



Stitchbond nonwoven, or stitchbond softback, mainly composed of polyester fibers composition, compared with the traditional jute and Action-bac, has the following characteristics: Mould proof and pest against / More evenly daub glue / Effective protection of yarn / Easy processing / comfortable hand- feeling / Non VOC and Heavy metal / Good stability against oven temperature / Reduced flammability / Using recycle fiber / No seasonal / Let carpets more soft.

缝线粘合非织造布，或缝线粘合软背，主要由聚酯纤维组成，与传统黄麻和活性炭相比，具有以下特点：防霉防虫/涂胶更均匀/有效保护纱线/易加工/手感舒适/不含VOC和重金属/对烘箱温度稳定性好/阻燃性降低/使用再生纤维/无季节性/让地毯更柔软。广泛应用于PVC地板革和地毯等铺地材料衬底。

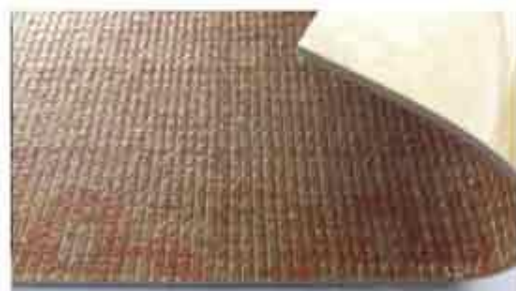

Specs (accept customized):

Needle gauge: 14 needles / 18 needles / 20 needles

Gram weight: 60gsm-120gsm

Color: Camel / White / other

Width: 200cm - 390cm

Hand feel: soft

规格 (规格可定制) :

针距: 14针、18针、20针

克重: 60克-120克

颜色: 驼色、白色、其他可定制

幅宽: 200cm - 390cm

手感: 软

EARTHWORK PRODUCTS\土工类产品



"M" CONFIGURATION DRAINAGE MATTRESS\ "M" 型排水减震垫




Drainage composite is made with three dimensional composite by thermobonding a draining core having "M" configuration in extruded monofilaments of minimum thickness 5mm -10mm, with two filtering UV stabilized polypropylene nonwoven geotextile of minimum thickness 0.75mm and tensile strength 8.0KN/m that will be working as separation or protecting layer.

APPLICATION: Used in basketball court, football field, school playground etc.

SEMI-VERTICAL LAYERS: 1-RCC walls, 2-MSE walls, 3-Tunnels, 4-Others.

HORIZONTAL LAYERS: 1-Embankments, 2-Roofing, 3-Sporting fields

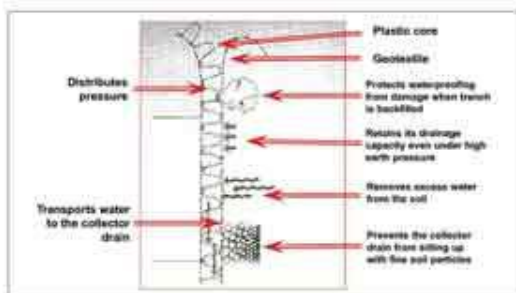

"M" 型排水减震垫由3层材料复合而成。厚度5mm-10mm,中间层为M结构的缓冲排水芯,上下两层为抗紫外线高强度聚丙烯非织造面料作为隔离层和保护层,应用于篮球场,足球场,学校操场,运动场等活动场地。

Specs (accept customized):

Thickness: 5.0mm - 10.0mm

Width: 1m-2m

Geotextile Strength: 5-8KN

Roll Length: Customizes

规格 (规格可定制) :

厚度 : 5毫米-10毫米

幅宽 : 1m-2m

复合布强度 : 5-8千牛

卷长 : 定制

HDPE GEOMEMBRANE\土工膜



HDPE geomembrane liners are used in a wide range of containment applications. Available in smooth, textured, white, conductive and high temperature variations, this material provides excellent durability and chemical resistance properties and is reliable in exposed applications, offering great ultraviolet protection and ageing resistance from the intense stresses of weather.



高密度聚乙烯 (HDPE) 土工膜衬里广泛应用于防渗漏领域。该材料具有光面、糙面, 优异的耐用性和耐化学性, 可提供极强的紫外线防护和抗恶劣天气的老化能力。厚度0.5mm-3.0mm, 宽度6m-8m.

Specs (accept customized):

Thickness: 0.5mm - 3.0mm

Width: 6m - 8m

Strength (N/mm): 24-85

Roll Length: 50m-200m

规格 (规格可定制) :

厚度 : 0.5毫米-3.0毫米

幅宽 : 6m - 8m

断裂强度(N/mm) : 24-85

卷长 : 50m-200m

GEOSYTHETIC BENTONITE CLAY LINER (GCL)\GCL膨润土防水毯



Geosynthetic Clay Liners (GCLs) are needle-punched reinforced composites which combine two durable geotextile outer layers with a uniform core of natural sodium bentonite clay to form a hydraulic barrier. Application : Golf course ponds /Stormwater management ponds /Recreational ponds/Landfill cap closures / base liner / Vertical trench cutoff Barrier / Groundwater protection cover / Environmental protection barrier under roads and railways / Secondary containment for above ground tanks.



膨润土防水毯是一种针刺增强复合材料，它将两层耐用的土工织物外层与均匀的天然钠基膨润土芯层结合起来，形成一个水力屏障。应用于高尔夫球场池塘、雨水管理池、休闲池塘、垃圾填埋场封盖/基层衬垫、垂直沟渠截断屏障、地下水保护层、公路、铁路下的环境保护屏障、地面储罐。

Specs (accept customized):

Thickness: $\geq 6.4\text{mm}$

Width: 3m - 6m

Gram Weight: 4kgs - 6kgs

Roll Length: 25m-30m

规格 (规格可定制) :

厚度: $\geq 6.4\text{mm}$

幅宽: 3m - 6m

膨润土含量 (每平方米) : 4kg - 6kg

卷长: 25m-30m

GEOBAG \生态袋



Geobag is a Vegetated Mechanically Stabilised Earth Wall System for retaining walls, slope stabilisation, stormwater, Swale Protection, erosion control and shoreline protection. The geobag system allows for easy landscaping design while providing a vegetated finish. Can be UV protection.



土工袋是一种植被稳定土壤系统，用于挡土墙、边坡稳定、雨水、植草沟保护、侵蚀控制和海岸线保护。土工袋系统可以进行景观设计，同时提供植被饰面，具有抗紫外线功能。

Specs (accept customized):

Size: 80cm*40cm / 81cm*43cm / customized

Color: Black / Green / White / other

Material: PP / PET

Anti ultraviolet: 500 hours

规格（规格可定制）：

尺寸：80cm*40cm / 81cm*43cm / 可定制

颜色：黑色、绿色、白色、其他

材质：丙纶、涤纶

抗紫：500小时

扬州丽铂环保材料有限公司

YANGZHOU LEEBO ENVIRONMENTAL PROTECTION MATERIAL CO.,LTD.

EMAIL: info@leebo.com.cn

www.leebotex.com

TEL:86-514-83813066